


I NOSTRI PRODOTTI

C A R B I D E

PREFORMATI

I PRODOTTI

Cilindri rettificati con 2 fori di lubrificazione laterali

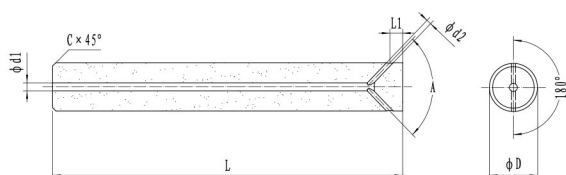


Cilindri rettificati con 2 fori di lubrificazione laterali

D(mm)		L(mm)		L1(mm)		C(mm)		d1		d2	
6	h5	57	+1/0	3	±0.3	0.4	±0.1	1.20	±0.15	0.80	±0.15
8	h5	63	+1/0	4	±0.3	0.6	±0.1	1.60	±0.15	1.10	±0.15
10	h5	72	+1/0	5	±0.3	0.8	±0.1	2.00	±0.15	1.40	±0.15
12	h5	83	+1/0	6	±0.3	0.8	±0.1	2.20	±0.15	1.60	±0.15
14	h5	83	+1/0	7	±0.3	0.8	±0.1	2.40	±0.15	1.70	±0.15
16	h5	92	+1/0	8	±0.3	0.8	±0.1	2.60	±0.15	1.90	±0.15
18	h5	92	+1/0	9	±0.3	1.0	±0.1	2.80	±0.15	2.00	±0.15
20	h5	104	+1/0	10	±0.3	1.0	±0.1	3.00	±0.15	2.10	±0.15

● Disponibili a magazzino ○ Disponibili a richiesta ◇ Altri gradi e dimensioni a richiesta

Cilindri rettificati con 3 fori di lubrificazione laterali


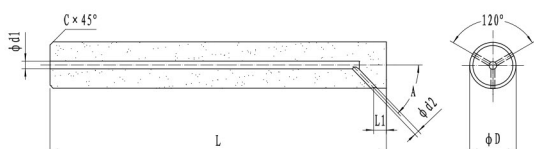


Cilindri rettificati con 3 fori di lubrificazione laterali

D(mm)		L(mm)		L1(mm)		C(mm)		d1		d2	
6	h5	57	+1/0	3	±0.3	0.4	±0.1	1.20	±0.15	0.70	±0.15
8	h5	63	+1/0	4	±0.3	0.6	±0.1	1.60	±0.15	0.90	±0.15
10	h5	72	+1/0	5	±0.3	0.8	±0.1	2.00	±0.15	1.20	±0.15
12	h5	83	+1/0	6	±0.3	0.8	±0.1	2.20	±0.15	1.30	±0.15
14	h5	83	+1/0	7	±0.3	0.8	±0.1	2.40	±0.15	1.40	±0.15
16	h5	92	+1/0	8	±0.3	0.8	±0.1	2.60	±0.15	1.50	±0.15
18	h5	92	+1/0	9	±0.3	1.0	±0.1	2.80	±0.15	1.60	±0.15
20	h5	104	+1/0	10	±0.3	1.0	±0.1	3.00	±0.15	1.70	±0.15

● Disponibili a magazzino ○ Disponibili a richiesta

Cilindri rettificati con 4 fori di lubrificazione laterali

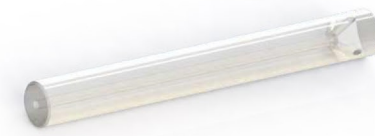
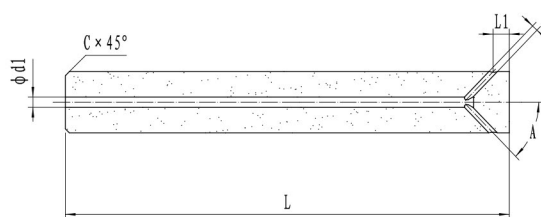


Cilindri rettificati con 4 fori di lubrificazione laterali

D(mm)		L(mm)		L1(mm)		C(mm)		d1		d2	
6	h5	57	+1/0	3	±0.3	0.4	±0.1	1.20	±0.15	0.60	±0.15
8	h5	63	+1/0	4	±0.3	0.6	±0.1	1.60	±0.15	0.80	±0.15
10	h5	72	+1/0	5	±0.3	0.8	±0.1	2.00	±0.15	1.00	±0.15
12	h5	83	+1/0	6	±0.3	0.8	±0.1	2.20	±0.15	1.10	±0.15
14	h5	83	+1/0	7	±0.3	0.8	±0.1	2.40	±0.15	1.20	±0.15
16	h5	92	+1/0	8	±0.3	0.8	±0.1	2.60	±0.15	1.30	±0.15
18	h5	92	+1/0	9	±0.3	1.0	±0.1	2.80	±0.15	1.40	±0.15
20	h5	104	+1/0	10	±0.3	1.0	±0.1	3.00	±0.15	1.50	±0.15

●Disponibili a magazzino ○Disponibili a richiesta ◇Altri gradi e dimensioni a richiesta

Cilindri rettificati con 5 fori di lubrificazione laterali

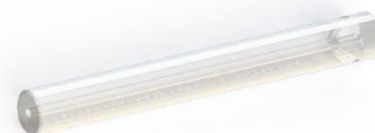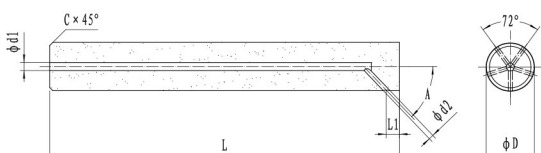

Cilindri rettificati con 5 fori di lubrificazione laterali

D(mm)		L(mm)		L1(mm)		C(mm)		d1		d2	
6	h5	57	+1/0	3	±0.3	0.4	±0.1	1.20	±0.15	0.50	±0.15
8	h5	63	+1/0	4	±0.3	0.6	±0.1	1.60	±0.15	0.70	±0.15
10	h5	72	+1/0	5	±0.3	0.8	±0.1	2.00	±0.15	0.90	±0.15
12	h5	83	+1/0	6	±0.3	0.8	±0.1	2.20	±0.15	1.00	±0.15
14	h5	83	+1/0	7	±0.3	0.8	±0.1	2.40	±0.15	1.10	±0.15
16	h5	92	+1/0	8	±0.3	0.8	±0.1	2.60	±0.15	1.20	±0.15
18	h5	92	+1/0	9	±0.3	1.0	±0.1	2.80	±0.15	1.30	±0.15
20	h5	104	+1/0	10	±0.3	1.0	±0.1	3.00	±0.15	1.40	±0.15

●Disponibili a magazzino ○Disponibili a richiesta

